


Product features & specifications

CONTROLS	
Steering	Forward, reverse, variable speed, two hand lever
Drive	Two Hydrostatic Transmissions with infinitely variable speed
FUEL	
Fuel capacity (litres)	35
PERFORMANCE	
Overall width (without bucket)	890mm
Overall height	1825mm
Overall length (with bucket)	2445mm
Tipping load (SAE)	640kg
Operating load (SAE)	320kg
Ground clearance (centre)	180mm
Machine weight (with fuel and std bucket)	1120kg
Dump height (dump angle 38°)	1835mm
Reach fully raised (dump angle 38°)	430mm
Dump angle (max)	38deg
Raising time (full load)	5.2sec
Lowering time (no load)	3.5sec
Dump time	3.5sec
Travel speed (forward)	9km/h
Travel speed (reverse)	9km/h
Clearance circle (with bucket)	1420mm
Gradeability (forward)	31%
Gradeability (reverse)	58%

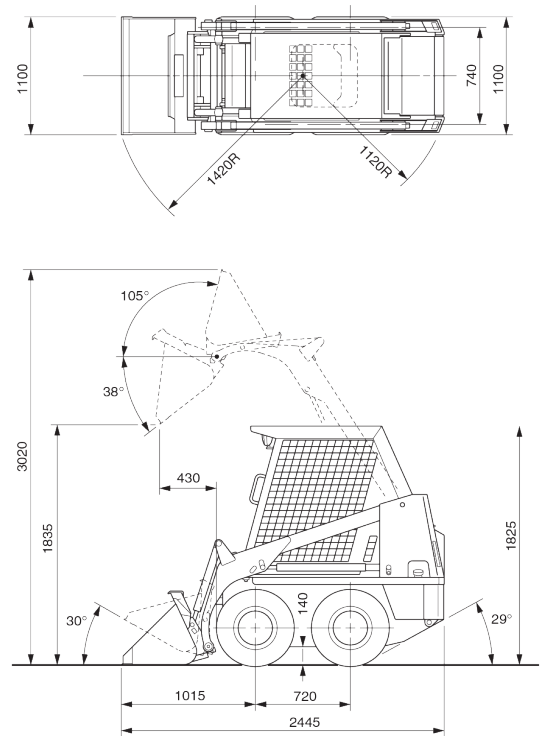

ALSO REFER TO:

1. Bobcat hazard assessment sheet
2. Bobcat operating procedure

RELATED ITEMS

- Post hole digger - 1 man
- Excavator with post hole digger
- Dingo with post hole digger
- Post hole digger - 2 man
- Post hole digger - manual
- Manual post hole cleaner
- Dingo with trencher
- Chain trencher
- Rock breaker
- Excavator 1.6 ton
- Dingo
- Motorised wheelbarrow "muck truck"
- Trencher