


## Scissor lift - Optimum 8


### TECHNICAL DATA

Working height	7.77m
Platform height	5.77m
Driveable at full height to	5.77m
Lift capacity - inside	230kg
Lift capacity - outside	230kg
a) Platform length - outside	1.72m
b) Platform length - extended	2.59m
Length - extension	0.86m
c) Platform width - outside	0.74m
d) Height - stowed	1.98m
e) Overall width	0.79m
f) Length	1.9m
g) Wheelbase	1.38m
h) Ground clearance - centre	8.7cm
Ground clearance - deployed potholes	2cm
Drive speed	0.5-4.5km/h
Gradeability	25%
Tilt	1.5°-3°
Lift / lower speed	20 s / 29 s
Turning radius - outside	1.5m
Non-marking tires	12.5 x 4.13
Batteries	24V - 225 Ah (C20)
Hydraulic system capacity	7L
Weight	1520kg

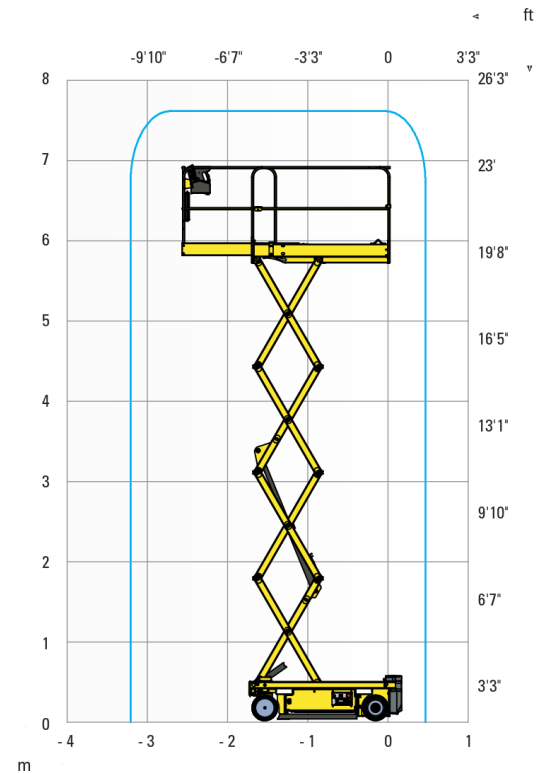

### STANDARD EQUIPMENT

- 24V electric drive Brushless AC motors
- Battery charge indicator
- Battery level indicator on upper and lower control boxes
- Haulotte Activ'Screen (battery charge, Hourmeter, service alert and failures icon in code or in full text)
- 2 swing out trays
- Lateral fork lifting pockets
- Electric or manual break release system
- Lifting and stowage points
- Non-marking tires

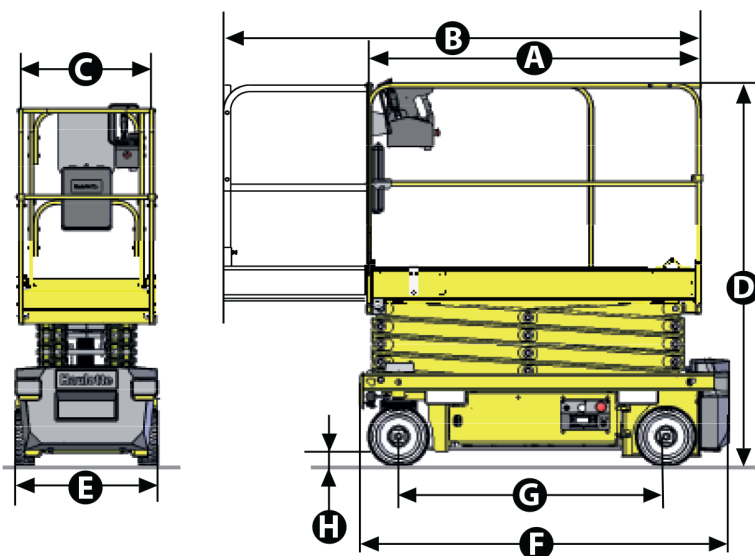

When service matters.  
**hiredepot.com.au**

**GLEN IRIS**

70 High St  
9885 4431

**FAIRFIELD**

323 Darebin Rd  
9499 9955