


Excavator 2 ton (TB219)

TECHNICAL DATA	
Engine	
Make	YANMAR
Model	3TNV70-NTB
Rated output (kW)/rpm	11.5/2500
Maximum torque (Nm)	48.4-52.7
Cylinders	3
Displacement (cc)	854
Electrical system	12 volt 40 amp
Dimensions & weight	
Operating weight inclusive of bucket and fuel: cab and canopy (kg)	2000/1890
Overall length (mm)	4050
Width cab / canopy (mm)	1370/ 980
Height cab / canopy (mm)	2360/2290
Ground clearance (mm)	205
Min. front swing radius (mm)	1195
Tail swing radius (mm)	1140
Dozer blade (w x h) (mm)	980 -1370 x 300
Operating information	
Max digging depth (mm)	2520
Max dump height cab/canopy (mm)	2860/2985
Max reach at ground level (mm)	4175
Max vertical digging depth (mm)	2075
Max bucket digging force (kN)	16
Max arm digging force (kN)	9.76
Hydraulic system	
Set pressure (bar)	210
Pump type	Variable x 2 Gear x 2
Hydraulic flow aux port (l/min)	40
Swing system	
Boom swing angle (R/L)	75°/50°
Slew speed (rpm)	8.7
Slew motor	Piston
Slew brake	Disc
Undercarriage	
Traction motor	Axial Piston
Traction drive	Planetary
Traction brake	Disc
Track width (mm)	230
Ground contact length (mm)	1205
Ground pressure (kpa)	33.1
Travel speed (km/h)	2.4/4.0
Maximum gradeability	15°
Capacities	
Hydraulic system (l)	35
Fuel tank (l)	24
Engine lubrication (l)	2.8
Cooling system (l)	3.7

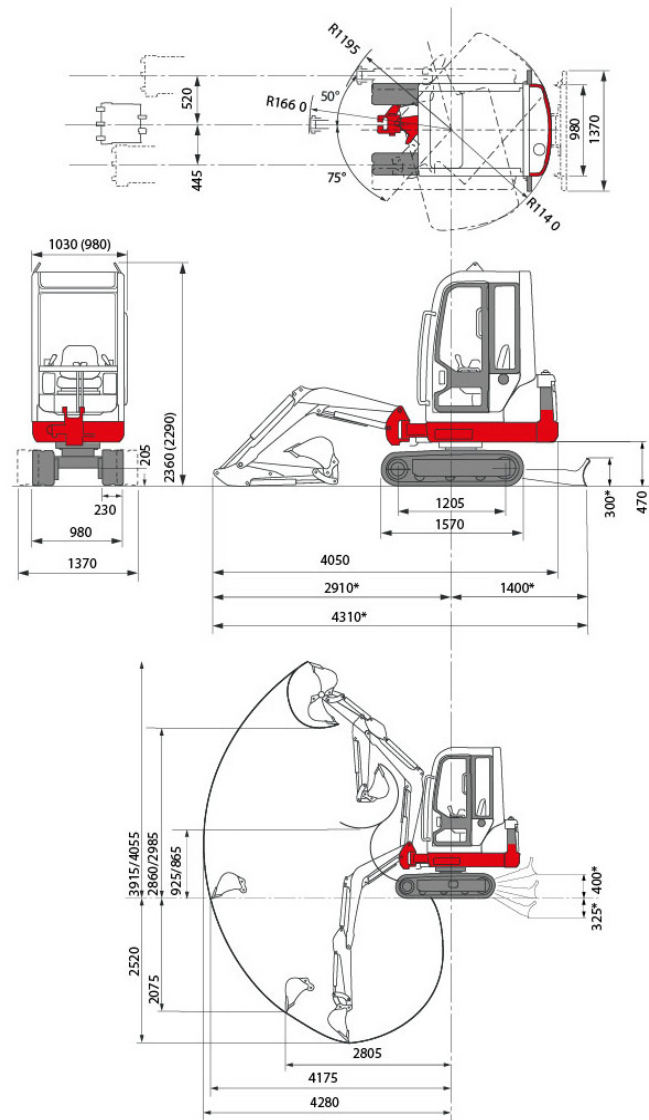

OPERATION

- Cushioned main boom and swing cylinders for smooth operation
- Safety operator lockout lever
- Boom mounted work light assists in all types of working conditions
- Optional boom holding valve

OPTIONS

- Breaker
- Quick Hitch
- Auger
- Bucket sizes from 150-1000mm

ALSO REFER TO

- Hazard assessment sheet
- Operating procedure

When service matters.
hiredepot.com.au

GLEN IRIS
 70 High St
 9885 4431

FAIRFIELD
 323 Darebin Rd
 9499 9955